



HATTELAND DISPLAY STANDARD		Created by:	Date:	Modified by:	Date:	Revision:
Material type and Quality:		4751	23-03-2009	7251	14-03-2009	2
Aluminum 5052, standard EN 485-2 (1 & 2)		Surface treatment:		(1) TYRIKATION (Zinc/Mangan Phosphating)		
Si-37 Alu/Zinc, standard EN 10215 (1)		(2) Powder coating RAL 9011 EPOXY STRUCTUR		Du Point EP931-465027		
Stainless Steel A430 1.4 L, standard EN 4404		Welding specification:		Tolerance:		
NS-EN-288-4		ISO 2768-1		midial		
Sheet metal fasteners:		PSM International or equivalent (www.psminternational.com)				


### FRONT VIEW

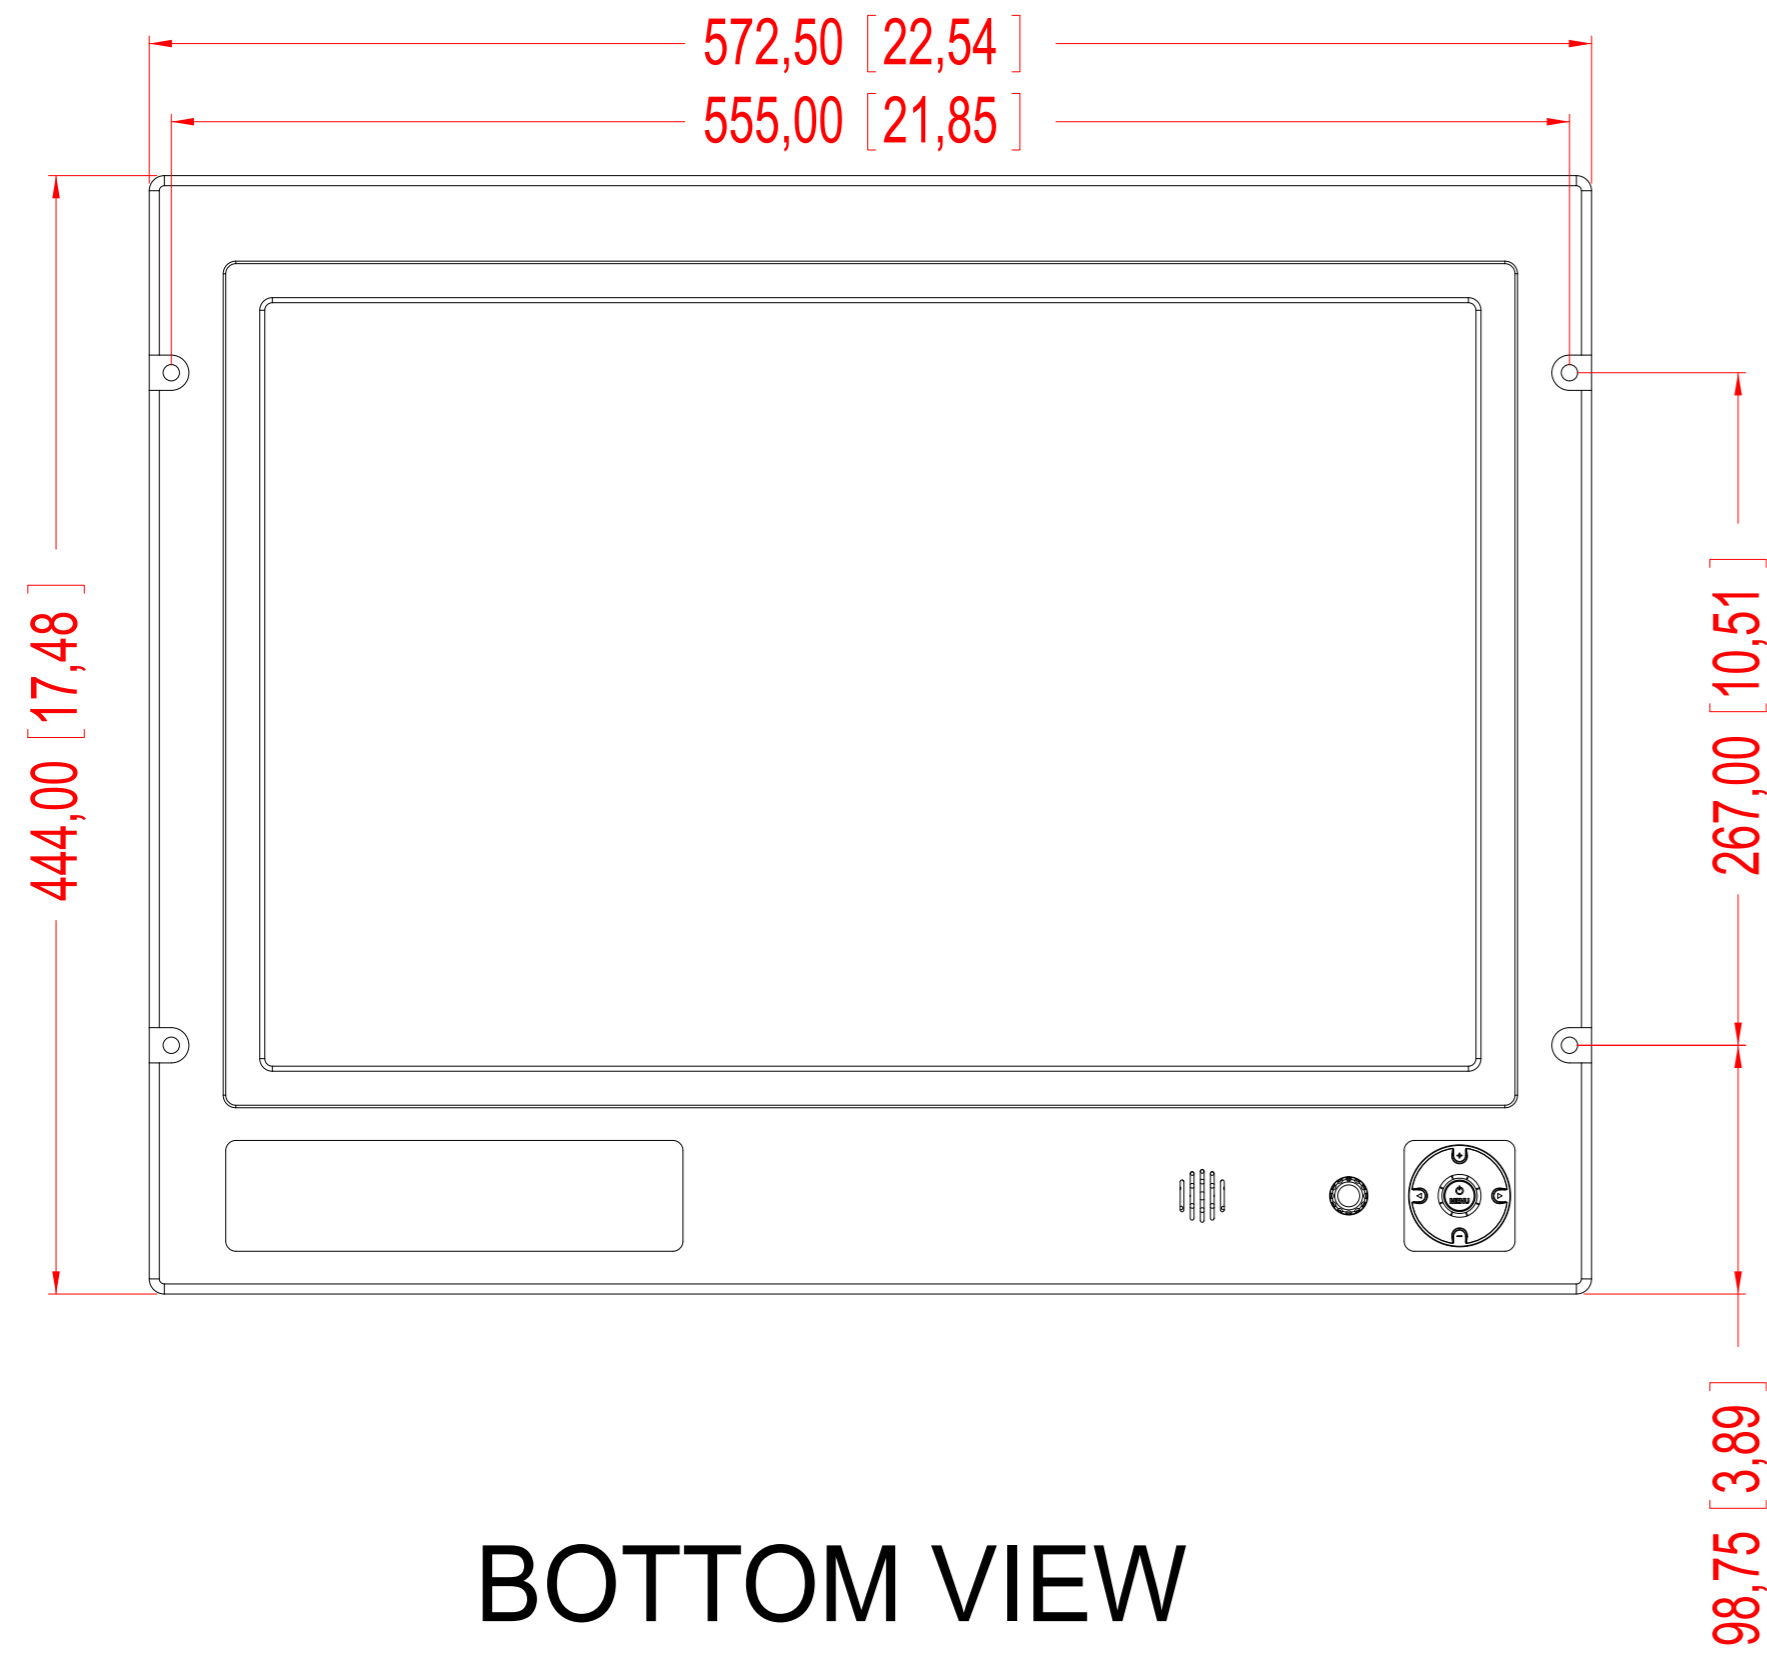


### SIDE VIEW

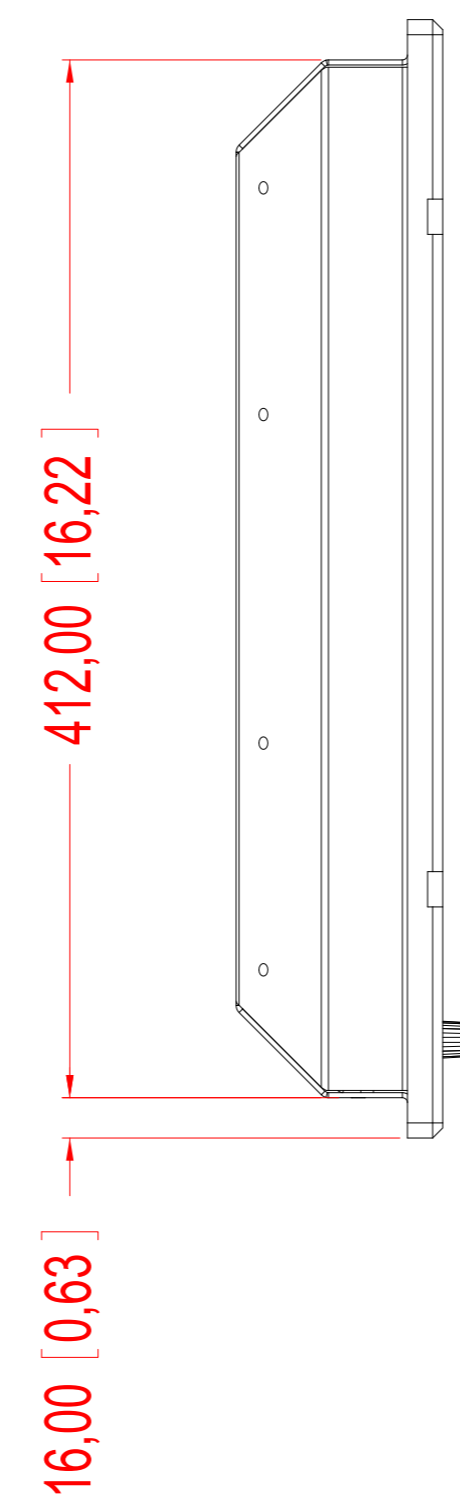


### BACK VIEW

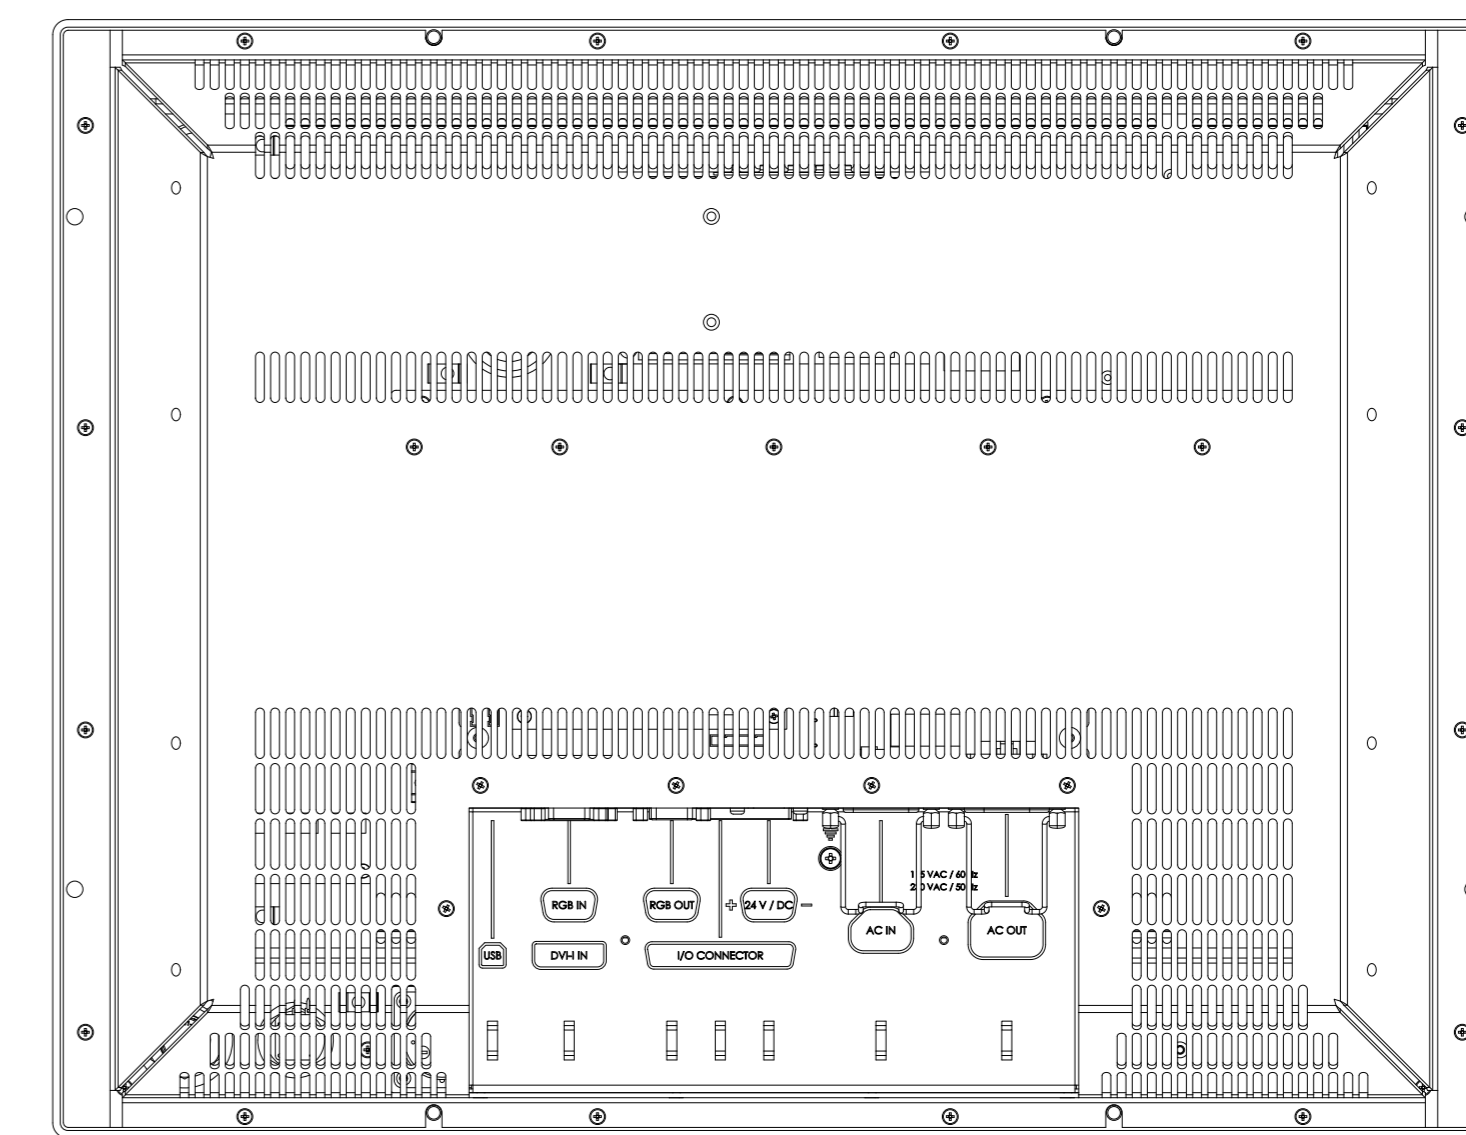



### BOTTOM VIEW

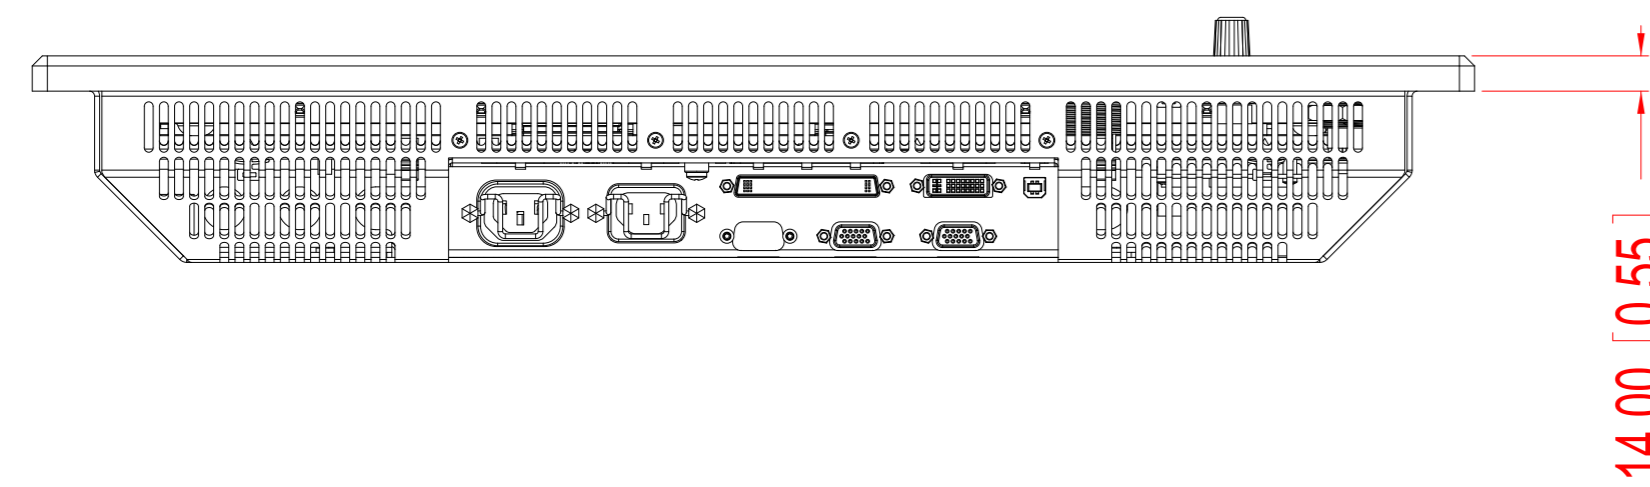

### DIMETRIC VIEW

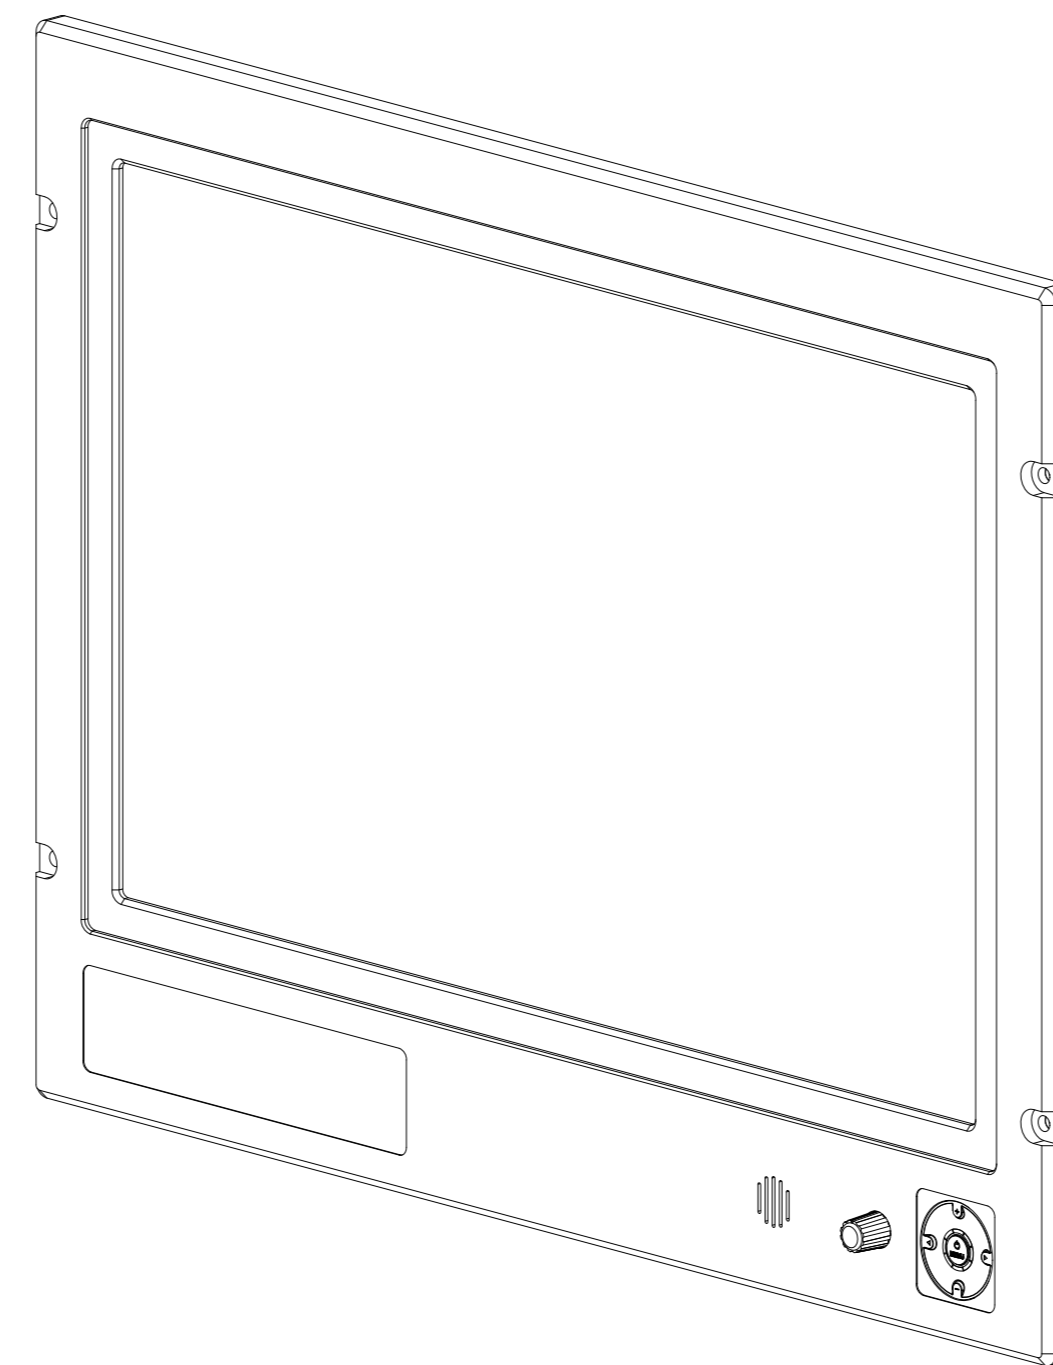

### TOP VIEW

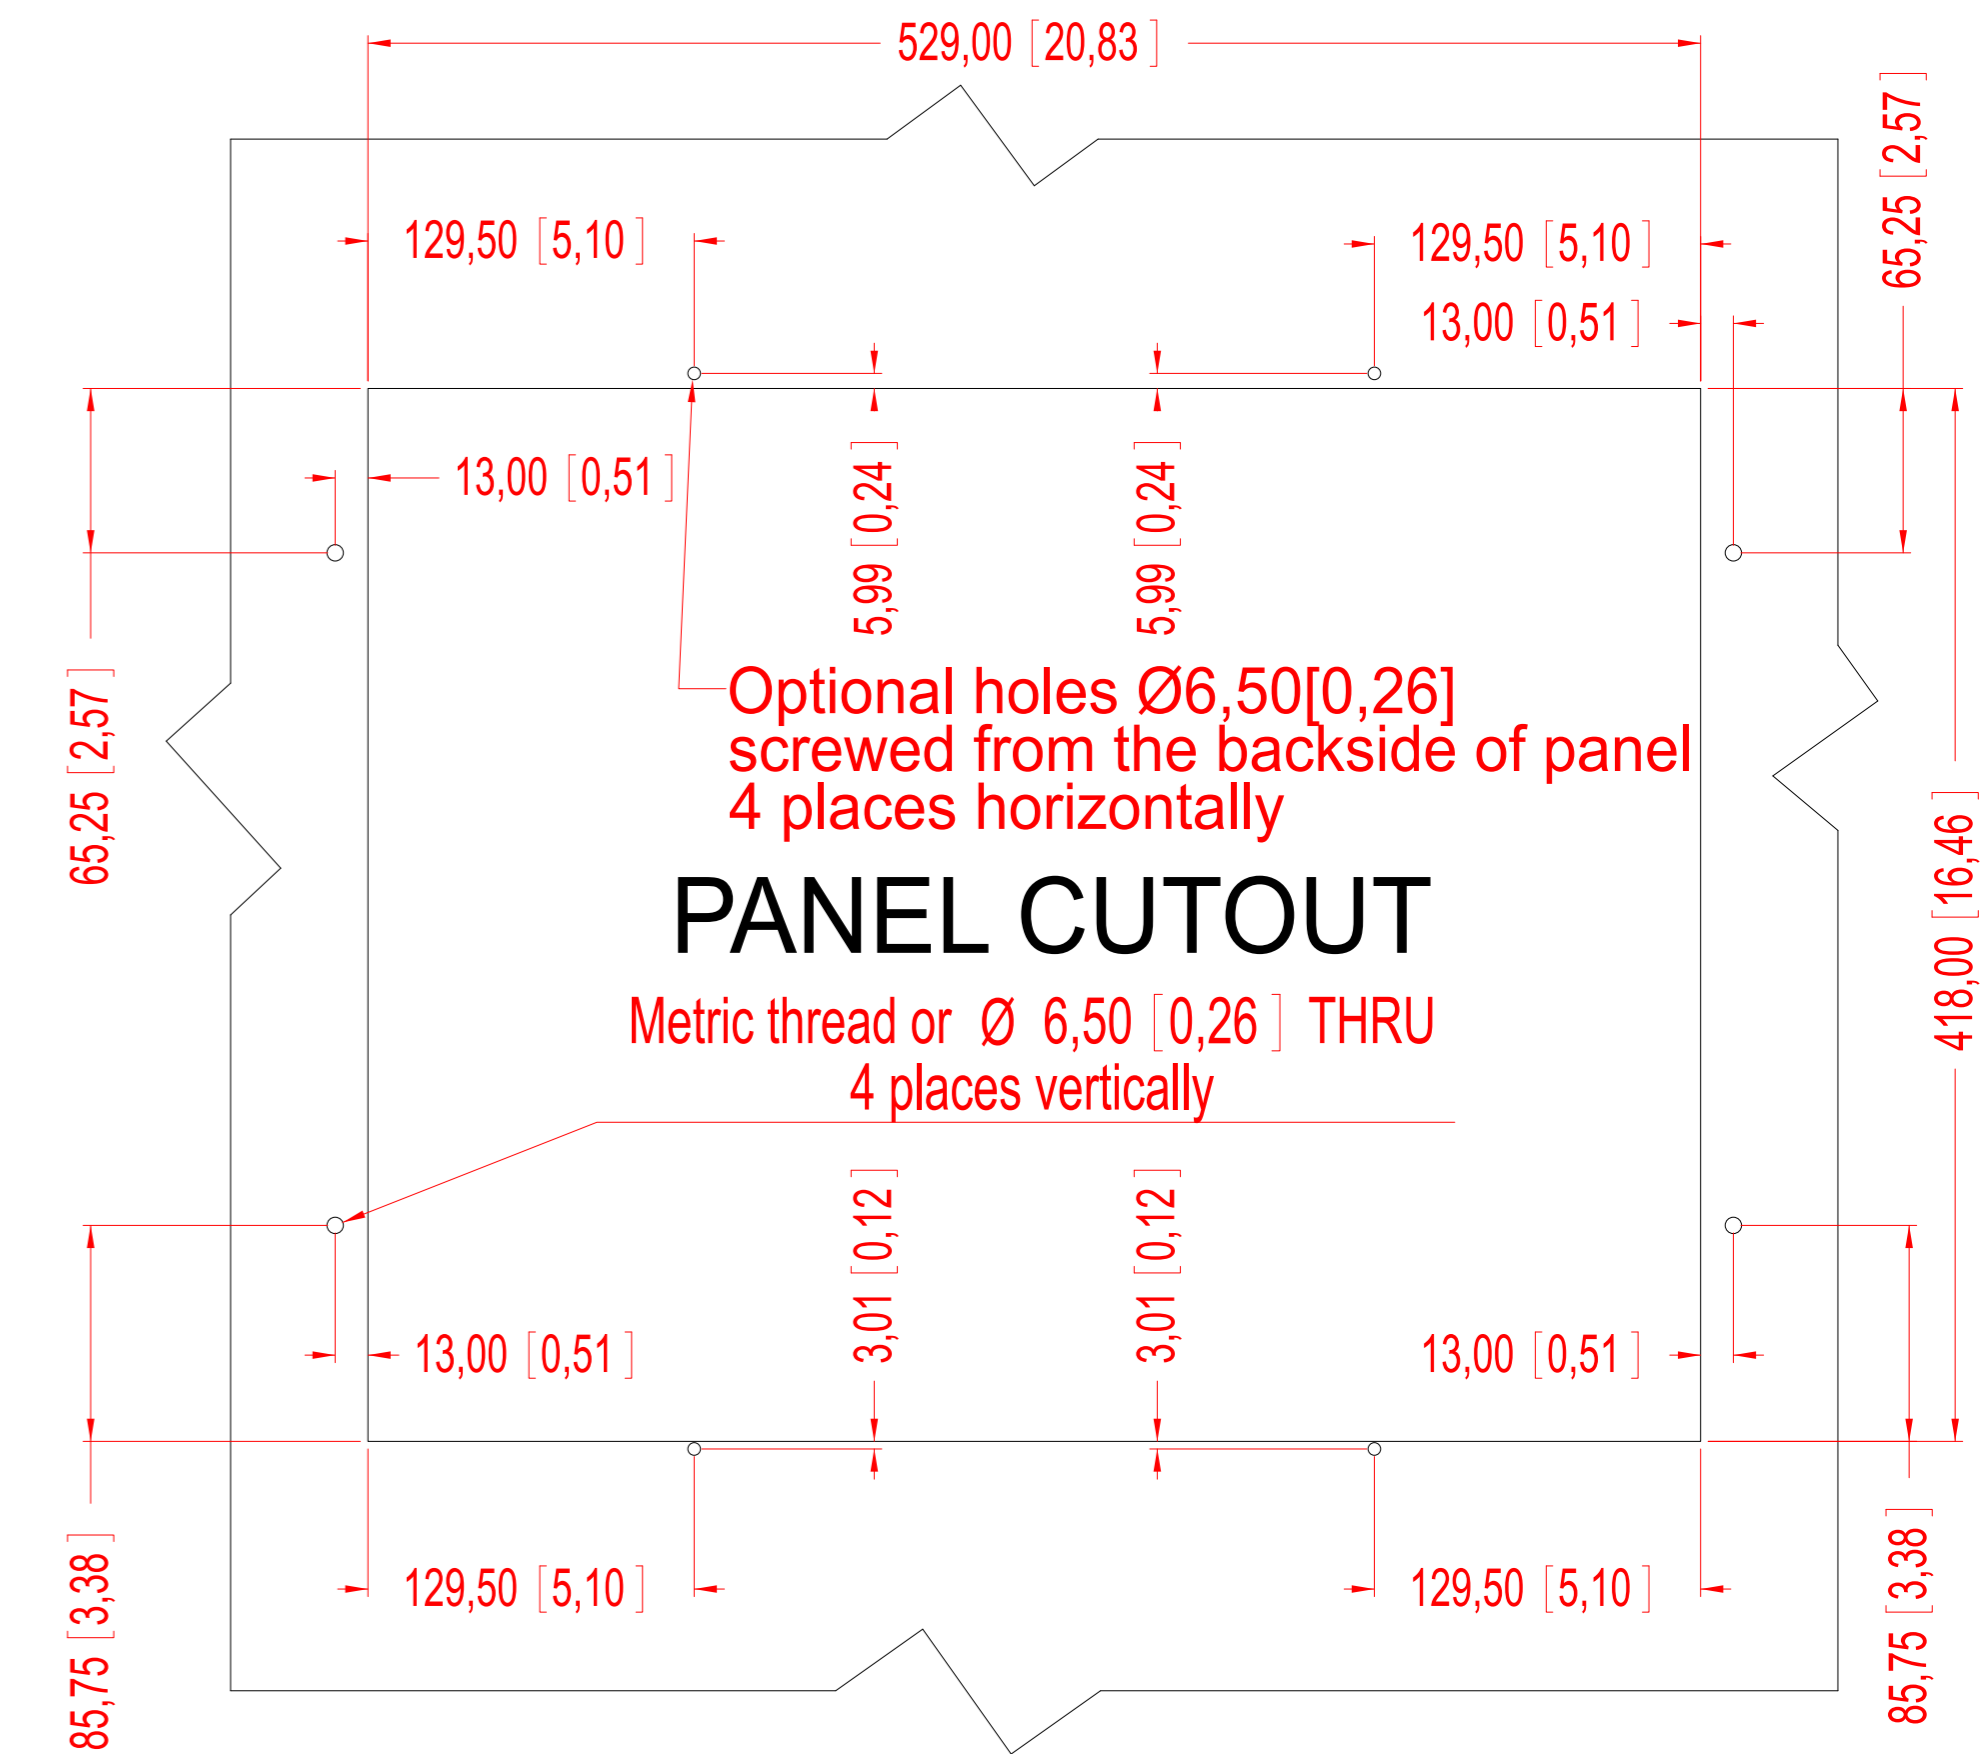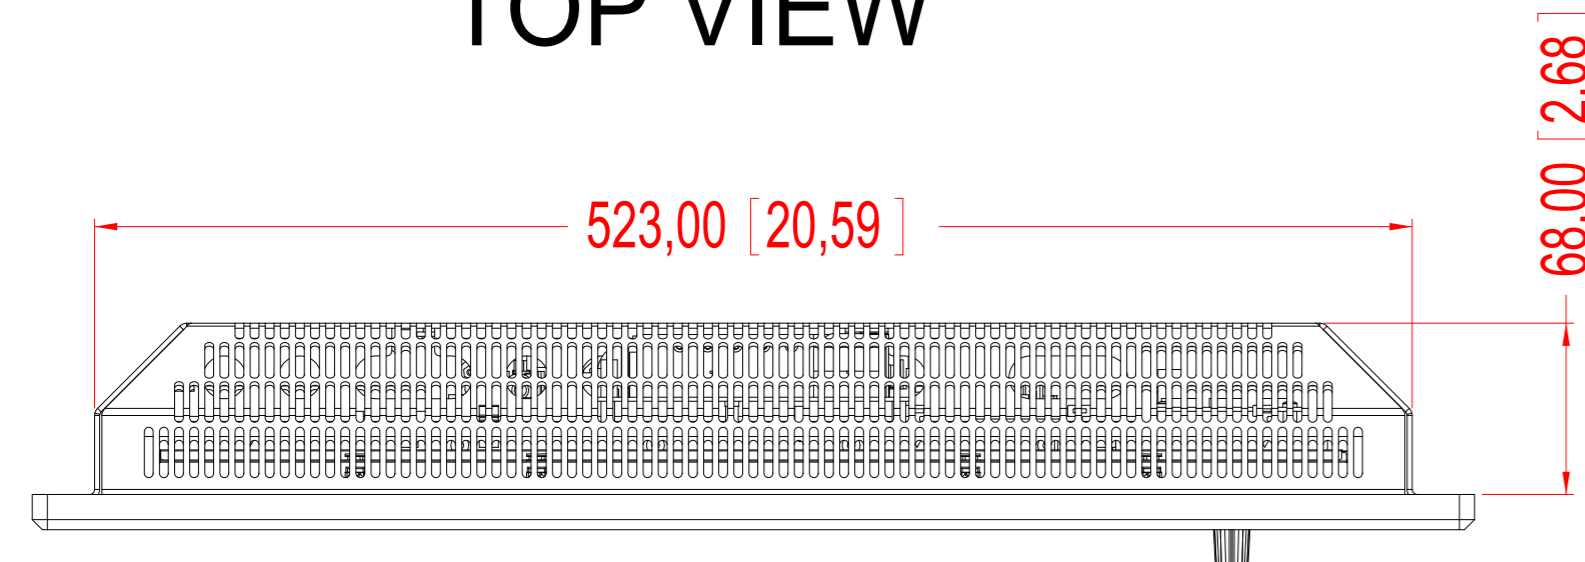

Units: mm [inches]

## SALES DRAWING JH 22T11 MMD

-AA1-AABA, AC Power model shown in this drawing, but measurements generally apply for all JH 22T11 MMD-xxx-xxxx models

Date:	Mechanical Design	Projection:	Size: A1 Format	<b>HATTELAND TECHNOLOGY</b> an EMBRON Company ®	
03-03-2009	7251		Scale: 1:5	Colour code:	Approved by: -
Hatteland Technology AS Eikeskogvegen 52 N-5570 Aksdal			Surface treatment:	Drawing number:	Revision: -
					<b>A001782-1</b>