

### Power Button

- Press to dim JCU II display
- Press and hold to wake camera or enter power menu

### SCENE Button - IR


- Press to change scene settings

### Manual Focus Buttons

- + Focus farther away
- Focus closer

### COLOR Button - IR

- Press to change palette
- Press and hold to change polarity

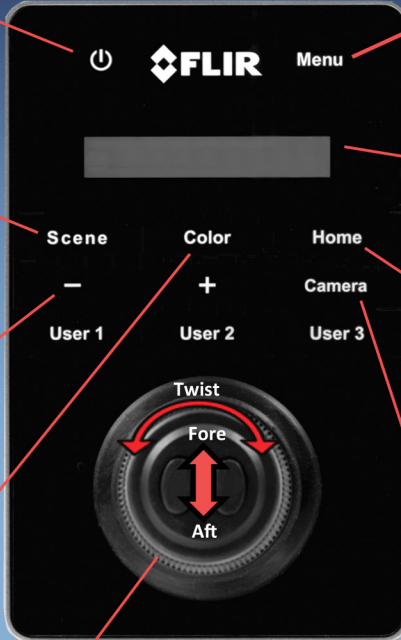

### MENU Button

- Press to enable on-screen menu
- Press to exit menu

### LCD Display

- Displays JCU info and power menu options
- Use joystick to interact

### HOME Button

- Press to return to home position
- Press and hold until home icon flashes to store new home

### CAMERA Button

- Press to select active camera

### Joystick

#### To Manage Camera

- Twist to zoom camera
- Push fore/aft to tilt camera
- Push left or right to rotate camera

#### To Navigate On-Screen Menu

- Push left/right/up/down to highlight menu item
- Press right joystick button to select menu item
- Push left/right to change numeric value
- Press right joystick button to toggle switch
- Press left joystick button to exit current menu item

#### To Navigate JCU LCD Menu

- Push fore/aft to scroll up/down
- Press left joystick button to select menu item


### View IP Address

- Press and hold COLOR button while pushing joystick forward
- IP address of the JCU II and then the camera will be shown on the LCD display


## Video Tracking



Acquisition



Tracking

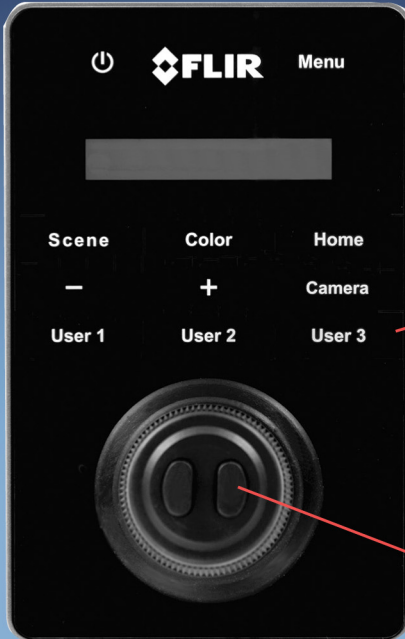

Coasting

### Default User Buttons

- User 1 - Autofocus
- User 2 - H-V Stab
- User 3 - Spotlight

### Enable Video Tracking

- Press right button
- Use joystick to center target in gate
- Press right button to engage tracking

### Resize or Move Acquisition Gate

- Press and hold right joystick button, twist joystick to change gate size
- Press and hold right joystick button, push joystick to move gate in video (gate is centered each time tracking is enabled)